

HYBRID HAY RUNNER

The "Hybrid Hay Runner" High Capacity Carted Rake!!

Featuring out-front independently mounted rake wheels for unobstructed hay flow. Adjustable Torsion Spring on each Rake Arm provides complete ground pressure control for clean raking on uneven ground and less tooth wear. Hydraulic flow divider insures equal lifting of rakes for quick turn arounds. Designed for easy single side raking.



NEW for 2012!
Wider axles
for
more stability

NEW for 2012!
2 Wheel Center Wheel Kit



Tandem Axles




Features

- | | |
|-------------------------|------------------------|
| High Capacity Design | High Clearance Frame |
| 8, 10 & 12 Wheel Models | Adjustable Tongue |
| Independent Rake Arms | Greaseable Wheel Hubs |
| 55" Rake Wheels | Adj. Torsion Springs |
| Narrow Transport Width | Easy Rake Angle Adj. |
| 7mm Rake Teeth | 15" Tires |
| Single Side Raking | 3" x 8" Hyd. Cylinders |
| Opt. Tandem Axles | Opt. Center Wheel Kit |

Easy Angle Adjustment



Torsion Spring provides equal tension as the Rake Wheel moves up and down with ground contour

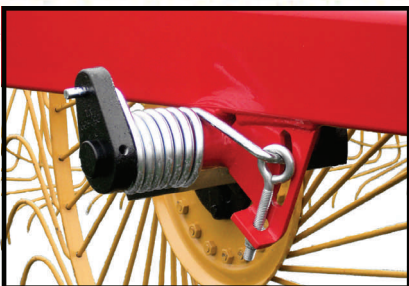

Patented design



Narrow transport width



OGDEN

Metalworks, Inc.

PO Box 128

Ogden, IL 61859

217-582-2552—Fax 217-582-2746

www.ogdenmetalworks.com

Hybrid Hay Runner Specifications

<i>Model</i>	HR8	HR10	HR12
Raking width*	16' to 19'	18' to 21'	20' to 23'
Number of wheels	8	10	12
Transport width	8' 4"		
Transport length**	19' 3" with tongue at minimum setting		
Transport height***	8' to 9' 5"		
Wheel hubs & bearings	Greaseable tapered roller bearings		
Wheel diameter	55"		
Tine diameter	7mm		
Number of tines per wheel	40		
Rake wheel suspension	Independent arm for each wheel – Teflon bushings at pivot		
Ground pressure adjustment	Patented adjustable torsion spring on each wheel		
Hydraulic cylinders	2 - 3" x 8" Double acting		
Hydraulic pressure requirement****	Minimum 1900 PSI		
Hydraulic remotes required	1 set		
Tires	205/75-15"		
Weight	1701 lbs.	1873 lbs.	2045 lbs.
Hydraulic Center Wheel Kit	Optional		
Walking Tandem Axles	Optional		
Wind Guards	Optional		

Specifications subject to change without notice

* Will vary depending on crop conditions

** Will vary depending on tongue adjustment

*** Will vary depending on rake adjustment

**** May be necessary to change Hay Runner cylinders to 3 1/2" x 8" for tractors below 1900 psi



PO Box 128

Ogden, IL 60958

Ph. 217-582-2552

Fax 217-582-2746

www.ogdenmetalworks.com